


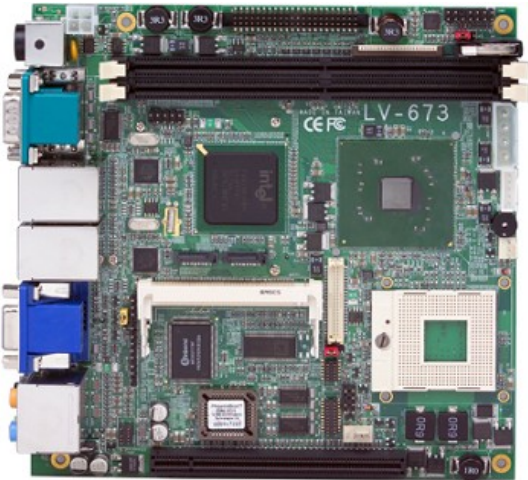

Product Name: Carte mere Commell LV-673ENS
Manufacturer: Commell
Model Number: CMCOLV-673ENS

Intel® Pentium M / Celeron M processor (170 x 170mm)

- Intel® 915GME & ICH6M
- 2 x DDR2 400/533 MHz SDRAM up to 2GB.
- Intel® GMA900 technology .
- Intel® High Definition Audio compliance.
- 1 x Mini-PCI socket and 1 x PCI-Express X16 slot.
- CompactFlash and PCMCIA socket on solder side.
- 2 x Giga LAN , 2 x SATA , 6 x USB 2.0 , S/PDIF.
- 4 x RS232 , GPIO , IrDA.

Form Factor

CPU

Memory

Chipset

Real Time Clock

Watchdog Timer

Power Management

PCI Enhanced IDE

VGA Interface

Video Memory

Mini-ITXexpress Motherboard
Intel® Pentium® M / Celeron M Package type:
FC-PGA478 Front side bus: 400/533 MHz (Intel
Celeron M 4xx series can't support)
2 x DDR2 400/533 MHzSDRAM up to 2GB
Intel 915GME & ICH6M
Chipset integrated RTC with onboard lithium battery
Generates a system reset internal timer for 1min ~ 255
min
ACPI 1.0 compliant, supports power saving mode with
DC adapter
1 x Ultra ATA100 IDE channel up to 2 ATAPI devices
Intel 915G integrated GMA(Graphic Media Accelerator)
900 Technology.
Up to 128MB shared with system memory

>

Serial ATA Interface	2 x Serial ATA Interface with 150MB/s transfer rate
Audio Interface	Intel ICH6M integrated with Realtek ALC880 HD Audio
LAN Interface	2 x Marvell 8053 PICE Gigabit LAN .
Solid State Disk	IDE1 supports DiskOnModule +5V power supply1 x CompactFlash socket on solder side.
GPIO Interface	Onboard programmable 8-bit digital I/O interface
Extend Interface	1 x Onboard PCI-Express X16 slot (X1 mode compatible)1 x Min-PCI socket 1 x PCMCIA Type II slot on solder side
External I/O Port	2 x RJ45 LAN port, 1 x DB15 VGA port, 1 x PS/2 Keyboard / Mouse ports, 2 x RS232 Serial port , 1 x DC Mini-DIN, 4 x USB 2.0 ports
External Audio Port	Line-in , Front, MIN-in , Surround , Center , Back Surround
Power Requirement	DC 12V
Board Dimension	170mm x 170 mm (L x W)
Operation Temperature	0 ~ 60oC (32 ~ 140oF)
LV-673ENS	Same as above but without PCMCIA and CF socket
LV-673E	Intel Pentium M Mini-ITXexpress Motherboard with 915GME & ICH6M chipset.Onboard VGA , Dual Gigabit LAN , SATA , USB 2.0 , Audio , 4 x RS232 serial ports , Mini-PCI , PCI-Express.

Specifications

Ce produit a ete rajouté a notre catalogue le vendredi 15 avril 2011