


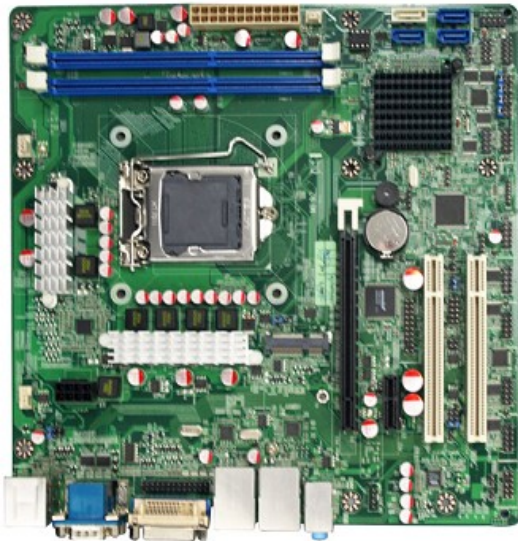

Product Name: JNMF92-H61-LF

Manufacturer: Jetway

Model Number: CMJEJNMF92-H61-LF

Carte mere industrielle ATX

- **INTEL® H61 Chipset**
- Support INTEL® LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- Support 2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
- Support TPM 1.2 function
- 1 * Mini PCI-E slot (Selectable W/mSATA)
- 4 * SATA2 connectors (SATA4 share with mSATA)
- HDMI, DVI-D and VGA Video Outputs
- Support 10 * COM ports (COM 10 for RS232/422/485)
- Support CPU Smart FAN
- Supports 2 * Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Micro ATX form factor

CPU

INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor

Chipset

INTEL® H61 Chipset

Memory

2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB

>	
Expansion Slots	1 *PCIe x 16, 2 * PCI, 1 * PCIe x 1
Storage	1 * MINI PCI-E (Selectable with mSATA) 4 * Serial ATA2 3Gb/s connectors (SATA4 share with mSATA)
Audio	1 * mSATA (Selectable with Mini PCI-E) Realtek ALC662 6-Channel HD Audio CODEC
Ethernet LAN	Realtek RTL8111E PCI-E Gigabit Ethernet LAN *2
USB	Embedded 9 * USB 2.0/1.1 Support ACPI S3
Special Features	Support CPU Smart FAN Support Watch Dog 6 * USB 2.0/1.1 ports 2 * RJ-45 ports 2 * COM ports
Rear Panel I / O	1 * VGA port 1 * DVI-D port 1 * HDMI port 3 * Audio Phone Jack 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports CPU /NB / Chassis Fan connectors 1 * PS2/KB header 1 * GPIO header
Internal I / O	8 * COM header (COM10 for RS232/422/485) 1 * TPM 1.2 header 1 * Parallel header 1 * Chassis Intrusion header 1 * AUDIO header 1 * 24-pin & 8-pin 12V ATX Power connector
BIOS	AMI EFI 32MB SMT Flash ROM
Form Factor	Micro ATX Form Factor (244mm x 244mm)
Functional	ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
Certificate	CE, FCC, RoHS
Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade
Specifications	

>

Ce produit a ete rajouté a notre catalogue le vendredi 20 janvier 2012