


>

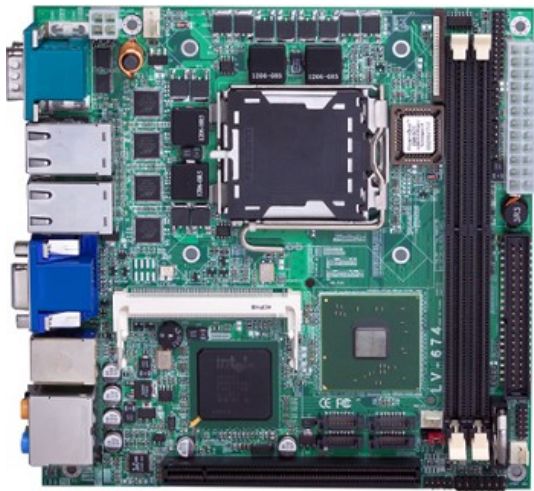

Product Name: Carte mère Commell LV-674E
Manufacturer: Commell
Model Number: CMCOLV-674E

Intel® Core™ 2 Duo / Pentium D LGA775 processor (170 x 170mm)

533/800/1066MHz FSB , EM64T supported
Intel® 945G & ICH7R .2 x DDR2 533/667MHz SDRAM up to 2GB.
Intel® GMA950 technology . 4 x SATA II with 300MB/s transfer rate.
Realtek 7.1-CH High Definition Audio. Onboard GPIO port.
1 x Mini-PCI socket and 1 x PCI-Express slot.
4 x Giga LAN , 2 x IEEE 1394 , 4 x USB 2.0 , S/PDIF.
2 x RS232 , GPIO , IrDA.

Form Factor	Mini-ITXexpress Motherboard (170 x 170 mm)
CPU	Intel Pentium D / Celeron D LGA775 533/800/1066 FSB. Support EM64T , Dual Core (Don't support Intel® Pentium® Processor Extreme Edition)
Memory	2 x DDR2 533/667 MHz SDRAM up to 2GB
Chipset	Intel 945G & ICH7R
Real Time Clock	Chipset integrated RTC with onboard lithium battery
Watchdog Timer	Generates a system reset internal timer for 1min ~ 255 min
Power Management	ACPI 1.0 compliant, supports power saving mode ATX PSU
PCI Enhanced IDE	1 x Ultra ATA/100 IDE channel up to 2 ATAPI devices
VGA Interface	Intel 945G integrated GMA (Graphic Media Accelerator) 950 Technology
Video Memory	Up to 224MB shared with system memory

>

Serial ATA Interface	4 x Serial ATA II Interface with 300MB/s transfer rate Support RAID 0,1,5,10 function
Audio Interface	Intel ICH7R integrated with Realtek ALC882 7.1 CHHigh Definition Audio
LAN Interface	4 x Marvell E8053 Gigabit Ethernet Controller
Solid State Disk	IDE1 supports DiskOnModule +5V power supply
GPIO Interface	Onboard programmable 8-bit digital I/O interface
Extend Interface	1 x Onboard 16x PCI-Express slot (x 1 mode compatible)1 x Min-PCI socket
External I/O Port	4 x RJ45 LAN port, 1x DB15 VGA port,1x PS/2 Keyboard / Mouse ports 2 x RS232 Serial port , 1 x IEEE1394 ports, 2 x USB 2.0 ports
External Audio Port	Line-in, Line-out , MIC-in , Front , Rear , Center/Subwoofer and side outputs.
Internal I/O Port	1 x slim FDD, 1 x IrDA , 2 x USB 2.0 , 1 x IEEE 1394 , 1 x CDIN , 1 x S/PDIF
Power Requirement	Standard 24-pin ATX power supply. (20-pin is compatible)
Board Dimension	170mm x 170 mm (L x W)
Operation Temperature	0 ~ 60oC (32 ~ 140oF)
LV-674E	Same as LV-674 and support Core 2 Duo Desktop CPU
LV-674	Intel Pentium 4 Mini-ITXexpress Motherboard with onboard VGA, 4 x Giga LAN, SATA, USB 2.0 ports Audio, IEEE1394, RS232 Serial port, Min-PCI, PCI-Express.

Specifications

Ce produit a ete rajouté a notre catalogue le vendredi 15 avril 2011