


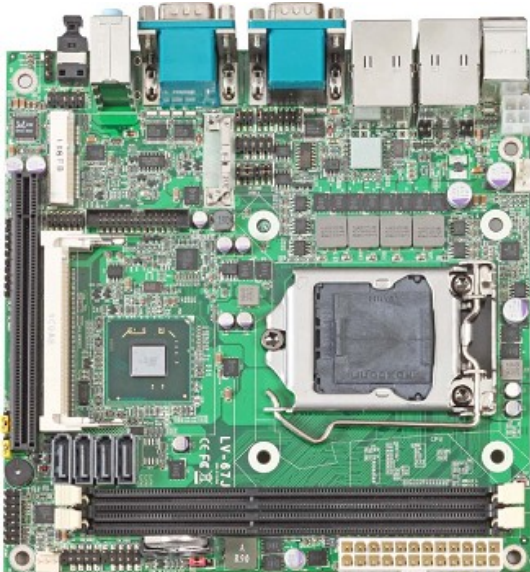

Product Name: LV-67J
Manufacturer: Commell
Model Number: CMCOLV-67J

- CPU: Intel® 3rd generation Core™ i7/ i5/ i3/ Desktop in the FCLGA1155 socket (support Intel® 2nd generation Core™ i7/ i5/ i3/ Desktop in the FCLGA1155 socket)
- Memory: Two DDR3 1006/1333 MHz up to 16 GB
- Chipset: Intel® Q77 Express chipset
- Integrated Graphics: Intel® Clear Video integrated HD Graphics Technology
- VGA Interface: Onboard DSUB15 connector for VGA interface
- DVI interface: Onboard DVI with 20-pin connector
- LAN Interface: 1 x Intel® 82574L Giga LAN and 1 x Intel® 82579LM Giga LAN
- Serial ATA: Support 4 x SATA (2 x serial ATAI, 2 x serial ATAIII)
- Audio: Realtek ALC888 High Definition Audio.
- I/O ports: 3 x RS232 and 1 x RS232/422/485 Serial Ports, 4 x USB2.0 ports, 4 x USB3.0 ports, 1 x DB15 VGA port, 1 x PS/2 keyboard and mouse ports, 1 x SPDIF(for option).
- Extended interface: 1 x PCI-Express X16 Gen3 slot, 1 x Mini PCI socket, 1 x PCIEMini card (Support mSATA or Mini_Card for option)
- GPIO interface: Onboard programmable 8-bit Digital I/O interface.
- Power requirement : Standard 24-pin ATX power supply (20-pin is compatible) and P4 4-pin 12V

Form Factor	Mini-ITX Motherboard
Processor	3 rd and 2 nd Generation Intel® Core™ i7/ i5/ i3/Celeron® Desktop Processor. Package Type: FCLGA1155

>

Memory	2 x DDR3 1066/1333 SO-DIMM up to 16 GB
Chipset	Intel® BD82Q77 PCH
Integrated Graphics	Intel® Core™ integrated HD Graphics Technology
Real Time Clock	Chipset integrated RTC with onboard lithium battery
Watchdog Timer	Generates a system reset with internal timer for 1min/s ~ 255min/s
Power Management	ACPI 1.0 compliant, supports power saving mode
Serial ATA Interface	Intel® Q77 PCH built-in 2 x Serial ATAII interface up to 300MB/s & 2 x Serial ATAIII interface up to 600MB/s Support RAID 0, 1, 5, 10 and Intel Rapid Storage Technology.
VGA Interface	Onboard DSUB15 connector for VGA interface
DVI Interface	Onboard 20-pin DVI interface
Audio Interface	Realtek ALC888 HD Audio
LAN Interface	1 x Intel® 82574L Gigabit Ethernet Controller 1 x Intel® 82579LM Gigabit Ethernet Controller
GPIO Interface	Onboard programmable 8-bit digital I/O interface
Extended Interface	1 x PCIE X 16 Gen3 slot, 1 x Mini PCI socket, 1 x PCIE Mini card Support mSATA or Mini_Card for option
Internal I/O Port	1 x RS232/422/485, 1 x GPIO port, 1 x CDIN connector, 1 x Audio connector, 1 x IrDA connector, 1 x SMBUS connector and 4 x USB 2.0 ports.
External I/O Port	1 x PS/2 Keyboard/Mouse Port, 2 x RJ45 LAN ports, 1 x DB15 VGA port, 4 x USB3.0 ports and 3 x Serial Port.
External Audio	Line-in, MIC-in, Front, Rear, Center/Subwoofer and Optical SPDIF outputs.
Power Requirement	Standard 24-pin ATX power supply (20-pin is compatible) and P4 4-pin 12V
Board Dimension	170 mm x 170 mm (L x W)
Temperature	Operating within 0 ~ 60°C Storage within -20 ~ 85°C

Specifications

Ce produit a ete rajouté a notre catalogue le jeudi 13 décembre 2012