


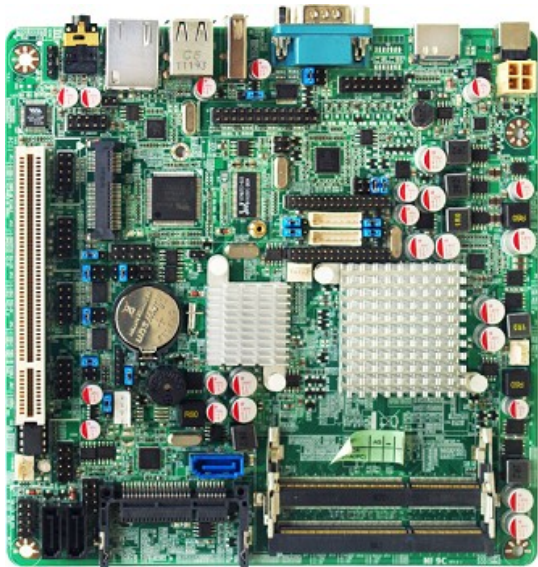

Product Name: JNF9C-2600
Manufacturer: Jetway
Model Number: CMJEJNF9C-2600-LF

Carte Mini-itx 12v Basse Consommation

- Processor N2600 + NM10 Chipset
- 1 * DDR3 800MHz Single CH SO-DIMM up to 2GB
- Support DirectX 9 Graphics up to 640MHz
- Support 1 * Serial ATAI (3Gb/s) & 2 * Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 2-CH
- Integrated 18-bits Single CH & 24-bits Dual CH LVDS
- Supports 1 * Realtek RT8111EVL Gigabit LAN
- Supports ACPI S3 Function
- Support CPU Smart FAN
- Support Watch dog Technology
- Mini-ITX Form Factor(17cm x 17cm)
- Slim & Fanless design, within 2cm height

CPU	INTEL® Cedar Trail-M Processor N2600(1.6GHz)
Chipset	INTEL®NM10 Express chipset
Memory	1 * DDR3 800MHz Single CH SO-DIMM up to 2GB(N2600)
Expansion Slots	1 * PCI slot
	1 * MINI PCI-E
Storage	1 * Serial ATAI (3Gb/s) & 2 * Serial ATAIII (6Gb/s) connectors
	1 * CFast card socket

>

Audio	Realtek ALC662 2-Channel HD Audio
Ethernet LAN	1 * RTL8111E PCI-EVL Gigabit LAN
LVDS	1 * 18-bits Single CH & 1 * 24-bits Dual CH LVDS connectors
USB	Embedded 7 * USB 2.0/1.1
Special Features	Support ACPI S3
	Support CPU Smart FAN
	Support Watch Dog
	3 * USB 2.0/1.1 ports
	1 * RJ-45 port
Rear Panel I / O	1 * HDMI port
	1 * COM port
	Line-out connector
	1 * 12V DC in
	2 * USB 2.0/1.1 headers for 4 USB 2.0 ports
	1 * KB/MS headers
	1 * VGA header
Internal I / O	NB / Chassis Fan connectors;
	2 * LVDS headers & 1 * GPIO header & 1 Parallel headers
	3 * COM headers (COM4 for RS232/422/485)
	1 * AUDIO header
	1 * chassis intrusion header
BIOS	AMI 16MB DIP Flash ROM
Form Factor	Mini ITX Form Factor (170mm x 170mm)
Functional	ATM, Security, Digital Signage, POS, General Application, Transportation
Certificate	CE, FCC, RoHS
Temperature	Operating within 0~60 centigrade
	Storage within -20-85 centigrade

Specifications

Ce produit a ete rajouté a notre catalogue le lundi 11 juin 2012