


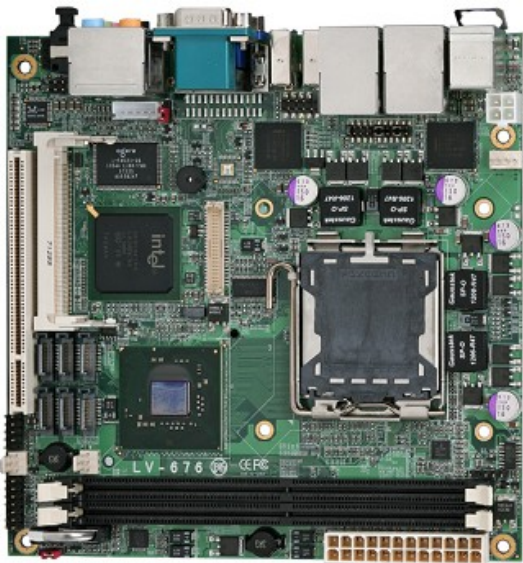

Product Name: Carte mère Commell LV-676 LVDS
Manufacturer: Commell
Model Number: CMCOLV-676X

Intel® Core 2 Quad / Core 2 Duo Desktop , 533/800/1066 MHz FSB

Intel® Q965 & ICH8DO , DDRII up to 4 GB , Onboard VGA ,
Optional LVDS or DVI interface , 1 x Mini-PCI and 1 x PCI slot
Onboard 2 x Intel® Gigabit LAN , HD Audio
RS-232/422/485 , IEEE 1394 , USB 2.0 ,
IrDA , SPDIF , GPIO

Form Factor

Processor

Memory

Chipset

Real Time Clock

Watchdog Timer

Power Management

VGA Interface

Video Memory

LVDS interface

Mini-ITX Motherboard (170 x 170 mm)
Intel® Core™ 2 Quad / Core™ 2 Duo/ Pentium
4/Pentium D Processor Desktop LGA775 533/800/1066
MHz FSB.
2 x DDR2 533/667/800 MHz support up to 4.0 GB
Intel® 82Q965 Express Chipset & ICH8DO
Chipset integrated RTC with onboard lithium battery
Generates a system reset internal timer for 1min ~ 255
min
ACPI 1.0 compliant, supports power saving mode ATX
PSU
Intel® Q965 integrated GMA 3000 Technology
Up to 384MB shared with system memory
Onboard 18/24-bits dual channel LVDS connector
(Optional)

>

DVI interface	Chrontel CH7307C DVI transmitter with onboard 26-pin DVI interface (Optional)
Serial ATA Interface	6 x Serial ATA II Interface with 300MB/s transfer rate Support RAID 0,1,5,10 function
Audio Interface	Intel® ICH8DO integrated with Realtek ALC888 HD Audio
LAN Interface	2 x Intel® 82573L Gigabit Ethernet Controller
GPIO Interface	Onboard programmable 8-bit digital I/O interface
Extend Interface	One PCI slot ,One Mini PCI socket to support Mini PCI Type III A
External I/O Port	2 x RJ45 LAN ports, 1 x DB15 VGA port and 1 x PS/2 Keyboard/Mouse Port, 4 x USB2.0 ports, 2 x IEEE1394 port , 1 x SPDIF connector, 1 x Serial Port
Internal I/O Port	1 x RS232/422/485, 1 x slim FDD port, 1 x GPIO port, 1 x CDIN connector,1 x Audio connector, 1 x IrDA connector, 2 x USB ports, 1 x DVI (Optional) ,1 x LVDS and 1 x LCD inverter connector (Optional)
Power Requirement	Standard 24-pin ATX power supply and P4 4-pin 12V . (20-pin is compatible)
Board Dimension	170mm x 170 mm (L x W)
Operation Temperature	0 ~ 60°C (32 ~ 140°F)
LV-676X	Onboard VGA , 2 x Intel Giga LAN, 6 x USB 2.0, Mini -PCI, PCI,2 x COM, 1 x FDD , HD Audio, 6 x SATA, 2 x 1394 , 1 x IrDA , LVDS

Specifications

Ce produit a ete rajouté a notre catalogue le vendredi 15 avril 2011