


AR-M9952/A

MicroBox with Geode CPU, 3 x 10/100Mbps LAN, CF, Serial Port, Onboard 128MB/256MB SDRAM, Mini-PCI, USB1.1 Port



Features

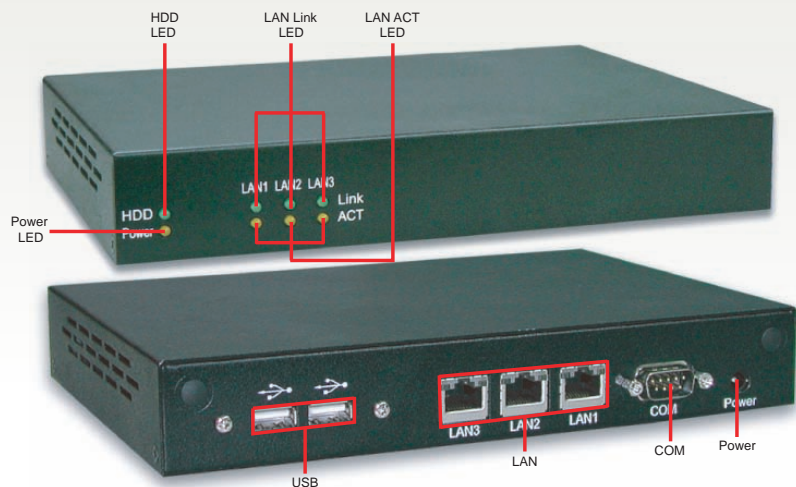

- ✓ MicroBox Fanless Solution
- ✓ AMD GX2
- ✓ Support Compact Flash
- ✓ Support 2.5" HDD
- ✓ Support Console Function

Networking System

Specification

System

CPU	AMD GX466
Chipset	NS Geode CS5535
Memory	AR-M9952: Onboard 128MB SDRAM AR-M9952A: Onboard 256MB SDRAM
BIOS	Award
OS	Windows 2000/XP, Linux6.5 and above

Video

Video Interface	VGA (Onboard pin header)
------------------------	--------------------------

Ethernet

Chipset	Realtek RTL8100C (10/100Mbps) x 3
Connector	RJ45
LAN	3 x 10/100Mbps LAN
PXE	Yes
Bypass LAN	N/A
Auto-MDIX	Yes

Storage

HardDisk Storage	1 x E-IDE (44-pin)
SSD	1 x Compact Flash socket

I/O

Serial Port	1 x RS-232 (1 x DB9)
USB Port	2 x USB1.1 (2 x external port)
Mini PCI	1 x Mini-PCI slot
Keyboard/Mouse	PS/2 keyboard and mouse pin header

Mechanical & Environment

Dimension	210mm x 150mm x 33mm
Power Requirement	DC 12V Input Power Supply
Operating Temp.	0~40°C (32~104°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	0 to 90% @ 40°C, non-condensing
Safety	CE FCC class A

Packing List

1. AR-M9952/A x 1
2. Driver CD x 1
3. Console cable x 1
4. VGA cable x 1
5. PS/2 keyboard and mouse cable x 1
6. HDD cable (44-pin) x 1
7. Power cord (Optional for USA or EU type) x 1
8. Power adaptor x 1

Standard

AR-M9952	MicroBox with Geode CPU, 3 x 10/100Mbps LAN, CF, Serial Port, Onboard 128MB SDRAM, Mini-PCI, USB1.1 Port, 2.5"HDD (Option)
AR-M9952A	Same as AR-M9952 but with onboard 256MB SDRAM

Distribue par Anteor - www.anteor.com - Tel : 01 61 37 07 00