


NF9D-2700

Intel® Atom™ D2700 Mini-ITX HDMI / LVDS / 2Gigabit LAN / 2COM / 8USB

Features

1. Embedded Long-life Series, 5 Year Availability
2. Next-Generation Intel Cedar Trail-D Platform
3. Intel Atom D2700 Processor, 2.13GHz, Dual-Core, 32nm, 10W
4. Integrated PowerVR SGX 545 Graphics, 640MHz, DirectX 9
5. Supports 2 * DDR3-1066 SO-DIMM up to 4GB
6. Supports 2 * SATA3 6Gb/s & 2 * SATA2 3Gb/s Devices
7. Dual Gigabit LAN with Enhanced Surge Protection
8. HDMI and 18-bit Single Channel LVDS
9. 1080P HD Playback, Blu-ray 2.0, Dual Independent Displays
10. Supports Jetway Daughter Board Expansion Modules
11. Watchdog Timer 1-255 min/sec
12. Mini-ITX Form Factor (170mm x 170mm)

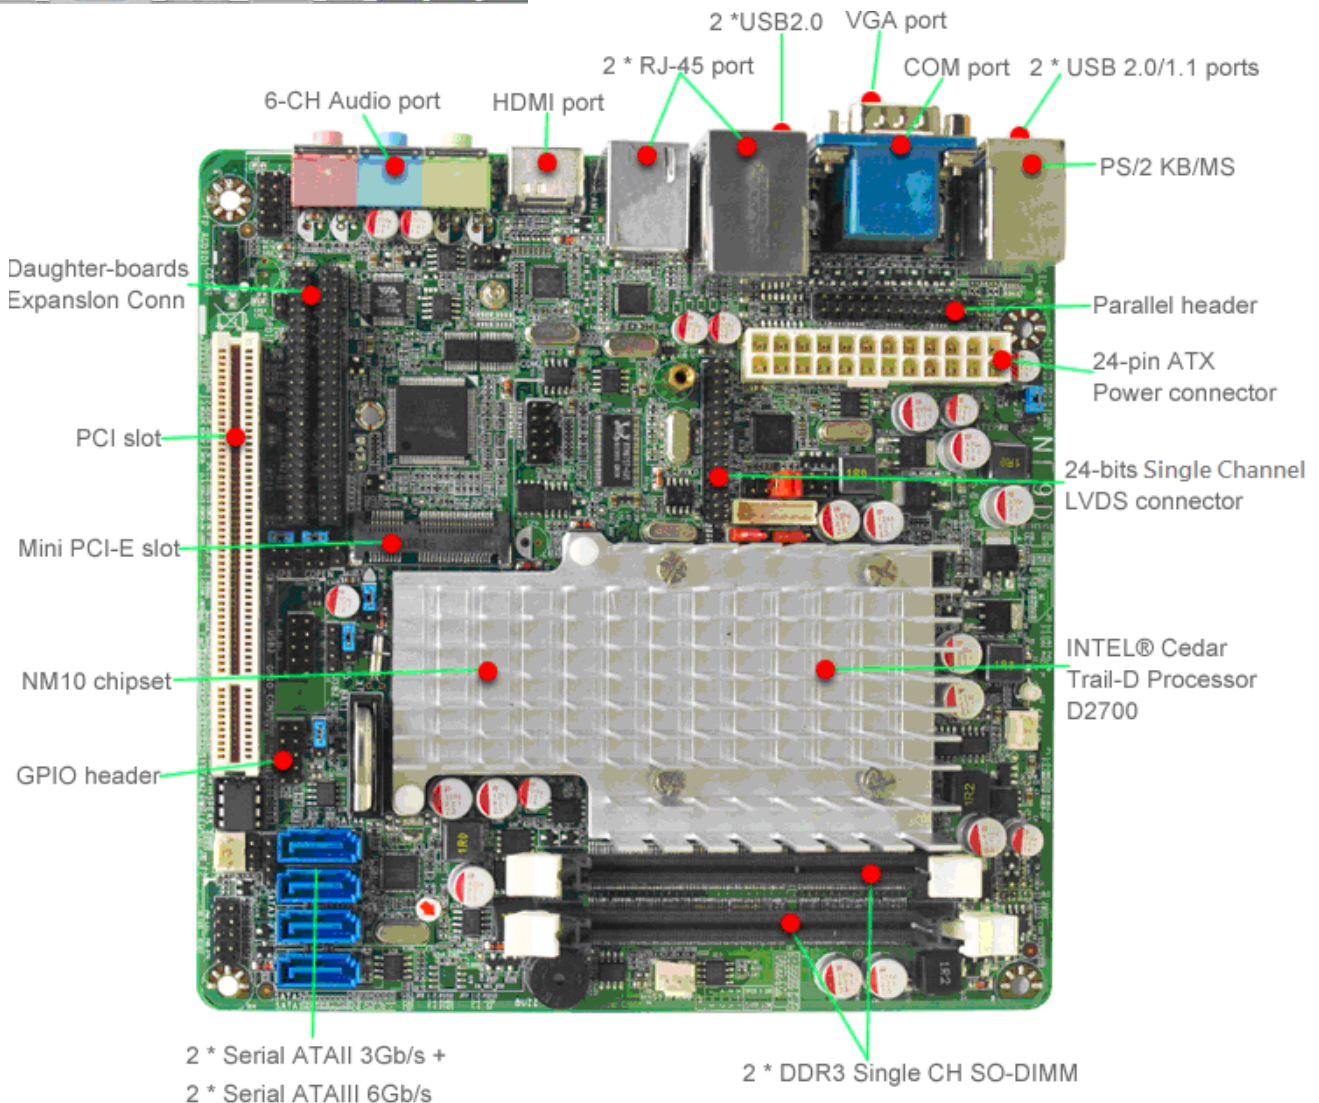



NF9D-2700 Specifications

CPU*	<ul style="list-style-type: none"> ■ Intel Atom D2700 Processor, 2.13GHz, Dual-Core, 32nm, 10W ■ Hyper-Threading Support, *Includes optional 40mm CPU Fan in box
Chipset	<ul style="list-style-type: none"> ■ Intel NM10 Express Chipset
Video	<ul style="list-style-type: none"> ■ Integrated PowerVR SGX 545 Graphics, 640MHz, DirectX 9
Memory	<ul style="list-style-type: none"> ■ 2 * 204-pin DDR3-1066 Single Channel SO-DIMM up to 4GB
Expansion Slots	<ul style="list-style-type: none"> ■ 1 * PCI Slot, 1 * PCI Express Mini Card Slot (full-size)
Storage	<ul style="list-style-type: none"> ■ 2 * SATA3 6Gb/s & 2 * SATA2 3Gb/s Ports
Audio	<ul style="list-style-type: none"> ■ Realtek ALC662 5.1 Channel Audio
Network	<ul style="list-style-type: none"> ■ 2 * Realtek RTL8111EVL PCI-E Gigabit LAN with Enhanced Surge Protection
LVDS	<ul style="list-style-type: none"> ■ 1 * 18-bit Single Channel LVDS & Inverter Headers
USB	<ul style="list-style-type: none"> ■ 8 * USB 2.0 Ports Total
Other Features	<ul style="list-style-type: none"> ■ Support ACPI S3, CPU Smart FAN, Watchdog Timer 1-255 min/sec
Rear Panel I/O	<ul style="list-style-type: none"> ■ 4 * USB 2.0 Ports ■ 1 * Serial Port (RS232) ■ 1 * VGA Port ■ 2 * RJ-45 Port ■ 3 * Audio Ports (Line-in, MIC, Line-out) ■ 1 * HDMI Port ■ 1 * Keyboard/Mouse Port
Internal I/O	<ul style="list-style-type: none"> ■ 2 * USB Headers for 4 * USB 2.0 Ports ■ 3 * Fan Headers ■ 1 * 24-pin ATX Power Connector ■ 1 * LVDS & Inverter Headers ■ 1 * Chassis Intrusion Header, 1 * GPIO ■ Jetway Daughter Board Expansion Connector ■ 1 * Serial Header (RS232/422/485) ■ 1 * Parallel Header, 1 * Audio Header ■ Front Panel Headers
BIOS	<ul style="list-style-type: none"> ■ AMI 16MB DIP Flash ROM
Box Contents	<ul style="list-style-type: none"> ■ NF9D Motherboard, SATA Cables, Serial Cables, Manual, DVD Driver Disk, I/O Shield, 40mm CPU Fan
Compliance	<ul style="list-style-type: none"> ■ CE, FCC, RoHS, ErP
Temperature	<ul style="list-style-type: none"> ■ Operating Temp 0~60° C ■ Storage Temp -20-85° C
Form Factor	<ul style="list-style-type: none"> ■ Mini-ITX Form Factor (170mm x 170mm)
Warranty	<ul style="list-style-type: none"> ■ 2 Years Limited Warranty

*This board is designed to be installed in a chassis with at least one exhaust fan.

**Specifications subject to change without notice, not responsible for typographical errors.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
38507 Cherry St., Suite E, Newark, CA 94560
www.jetwaycomputer.com

