

## FX fanless series

# FX5405- CAN BUS for DIN Rail

C-M Small Cube System with VGA, 1S, 1CAN, 2LAN, 4USB, Audio and Mini-PCI



### Features

- Fanless and low power consumption design
- Intel Celeron-M 600MHz CPU
- 512MB DDR- RAM inside system
- One PS/2 KB/MS
- One VGA
- 2 LAN (1 Giga +1 100/10 Base-T)
- 1 CANBus
- 1 COM Port
- 4USB(V2.0)
- One CompactFlash Slot
- One 2.5" HDD space
- 1 Mini PCI Slot
- 4 LED Indicators

### Specifications

**CPU Board:** Intel Celeron-M 600 MHz CPU board with 256MB DDR-RAM

**I/O Outlets:**

- 1 PS/2 Keyboard/Mouse
- 1 VGA connector
- 2 RJ45 Connector(1XRTL8110SC 10/100/1000M and 1XRTL8110X \*10/100 Base-TX Ethernet ports
- 4 USB ports (V2.0)
- 1 RS232/RS422/RS485 port
- 1 CANBUS port (Philips SJA1000 Controller)
- 1 DC-In connector
- 1 Mini PCI slot
- 1 push button power switch
- 1 push button reset switch

**Storage Bay:**

- 1 2.5" HDD space
- 1 CompactFlash slot

**LED Indicators:**

- 1 power LED (Green) and 1 HDD LED (Red)
- 2 LAN Led (Green)

**Power Req.:** DC 12V – 24V, 25VA maximum With 2.5" HDD & 19v input voltage.

**Operating Temperature:** 0–50 degree C. (32–122 degree F.)


**Dimensions:** 165mm (W) x 120mm (D) x 65mm (H)

**Accessory:**

- 1 utility Disc
- 1 AC-DC adapter with AC power cable
- 1 CBL-KB+MS-Y type keyboard and mouse adapter cable
- 1 Din Rail mounting kit with 3 screws
- 1 2-pin apartable terminal block.
- 1 44-pin flat cable and 4 screws for fixing and connecting a 2.5" hard disk drive.

**Optional Item:**

- 1 FX5504 K1 or FX5404K1 Universal fixers

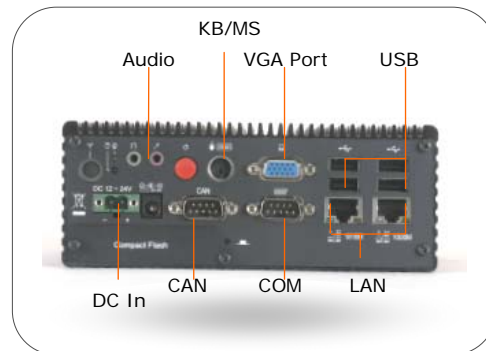

### Ordering Information

Model	Description	Drivers
FX5405	Intel Celeron-M Embedded System with 2 LANs, 1 COM port, 1 CAN BUS port, 4 USB, Audio and 512MB DDR RAM.	<ul style="list-style-type: none"> <li>* VGA/Audio Win95/98/NT/2K/XP</li> <li>* LAN Novell 3.X / 4.X, Win95/98/2K/XP, Linux, NDIS, MSLAN</li> <li>* USB Win95/98/NT/2K/XP</li> </ul>