

Distribué par :




Antéor

ANTEOR / DIPM
2, rue Pablo Picasso
78114 Magny-les-Hameaux
France
Tél. : +33 (0)1 61 37 07 01
E-mail : contact@anteor.com

Neousys **MezIO[®] Modules**

MezIO®-C180/ MezIO®-C181

8-port RS-232/ 422/ 485 MezIO® Module

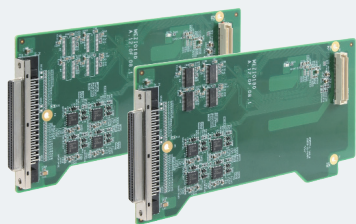

Key Features

- 4x RS-232/422/485 multi-mode ports
- 4x RS-232 ports (C180) or 4x RS-422/485 ports (C181)
- Up to 921.6 Kbps baud rate
- BIOS-configurable mode/termination settings
- Supports Windows 7/8/8.1/10
- SCSI-II 68-pin connector

Specifications


	MezIO®-C180	MezIO®-C181
# of Port	4x RS-232/ 422/ 485 4x RS-232	4x RS-232/ 422/ 485 4x RS-422/ 485
Baud Rate	50 bps to 921600 bps	
FIFO	256-byte TX and RX FIFOs	
ESD Protection	8 kV	
Interface Signals	RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND RS-422: TxD+, TxD-, RxD+, RxD-, GND RS-485: Data+, Data-, GND	
Connector	68-pin SCSI-II female connector	
OS Support	Windows 7/ 8/ 8.1/ 10 and Linux kernel 2.6.32 or later	

Ordering Information

Model No.	Product Description
MezIO®-C180-50	4x RS-232/ 422/ 485 and 4x RS-232 ports MezIO® module, for Nuvo-11000/ Nuvo-9000/ Nuvo-7000/ POC-900/ POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series
MezIO®-C181-50	4x RS-232/ 422/ 485 and 4x RS-422/ 485 ports MezIO® module, for Nuvo-11000/ Nuvo-9000/ Nuvo-7000/ POC-900/ POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series
Cbl-S68M-8DB9M-50CM	SCSI-68(M) to 8x DB-9(M) cable, 50 cm

MezIO®-V20/ V21

16-mode Ignition Power Control MezIO® Module



Key Features


- Ignition power control with 16 predefined on/ off delay modes
- Ultra-low 12 mA ignition-off standby power
- Advanced ignition control features
 - Low-battery protection
 - Guarded power-on/ power-off delay duration
 - System hard-off
 - BIOS POST check
- Supports 12V DC (small vehicle) and 24V DC (bus/ truck) vehicles

Ordering Information

Model No.	Product Description
MezIO®-V20-EP	16-mode ignition power control MezIO® module for in-vehicle usage, for Nuvo-11000E/ Nuvo-9000E/P/DE/ Nuvo-9160GC/ Nuvo-9166GC/ Nuvo-7160GC/ Nuvo-7164GC/ Nuvo-7000E/P/DE series
MezIO®-V20	16-mode ignition power control and 1x mini-PCIe socket (USB2 only) for in-vehicle usage, POC-900/ POC-700/ POC-500/ Nuvo-11000LP/ Nuvo-9000LP/ Nuvo-7000LP series
MezIO®-V21	16-mode ignition power control and 1x mini-PCIe socket (USB2+PCIe) for in-vehicle usage, POC-900/ POC-700/ POC-600/ POC-500/ Nuvo-11000LP/ Nuvo-9000LP/ Nuvo-7000LP series

MezIO® -D330

16-CH isolated DI and 16-CH isolated DO
MezIO® module



Key Features

- 16-CH isolated digital input
- 16-CH isolated digital output
- 2500 Vrms isolation voltage
- Support sink and source wiring type
- Up to 24V DC operation for DI and DO
- Up to 250 mA sink/source current on DO channel
- SCSI-II 68-pin connector

Specifications


Isolated Digital Input	
# of Channels	16
Wiring Type	Sink/ Source mode
Isolation Voltage	2500 Vrms
Logic Level	Logic high: 3.3 to 24 VDC Logic low : 0 to 1.5 VDC
Rated Input Voltage	0V to 24 VDC
Operation Mode	Polling
Isolated Digital Output	
# of Channels	16
Wiring Type	Sink/ Source mode
Isolation Voltage	1500 Vrms
Operation Voltage	0V - 24 VDC
Driving Current	250 mA
Operation Mode	Polling

Ordering Information

Model No.	Product Description
MezIO® -D330	16-CH isolated DI and 16-CH isolated DO MezIO® module for Nuvo-11000/ Nuvo-9000/ Nuvo-7000/ POC-900/ POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series
Cbl-S68M-S68M-100CM	SCSI-68 (Male) to SCSI-68M (Male) cable, for MezIO® DIO card and TB-10, Length: 100CM
TB-10	Terminal board with 68-pin SCSI-II female connector and 68-pole terminal block

MezIO®-D230/ MezIO®-D220

32/ 16-CH Isolated Digital I/O MezIO® Module

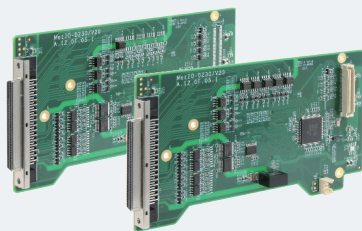

Key Features

- 16-CH isolated DI (D230) or 8-ch isolated DI (D220)
- 16-CH isolated DO (D230) or 8-ch isolated DO (D220)
- 2500 Vrms isolation voltage
- Up to 24V DC operation for DI and DO
- Up to 500 mA sink current on DO channel
- SCSI-II 68-pin connector

Specifications


	MezIO®-D230	MezIO®-D220
Isolated Digital Input		
# of Port	16	8
Logic Level	Logic high: 5 to 24 VDC ; Logic low: 0 to 1.5 VDC	
Isolation Voltage	2500 Vrms	
Operation Mode	Polling, COS	
Isolated Digital Output		
# of Channel	16	8
Operation Voltage	Up to 24 VDC	
Sink Current	500 mA for each channel (100% duty)	
Isolation Voltage	2500 Vrms	
Operation Mode	Polling, COS	

Ordering Information

Model No.	Product Description
MezIO®-D230-50	16-CH isolated DI and 16-CH isolated DO MezIO® module, for Nuvo-9000/ Nuvo-7000/ POC-500/ POC-300 Series
MezIO®-D220-50	8-CH isolated DI and 8-CH isolated DO MezIO® module, for Nuvo-9000/ Nuvo-7000/ POC-500/ POC-300 Series
Cbl-S68M-S68M-100CM	SCSI-68(M) to SCSI-68(M) cable, 100 cm
TB-10	Terminal board with 68-pin SCSI-II female connector and 68-pole terminal block

MezIO®-R11/ R12

2.5" SATA HDD/ SSD and mini-PCIe Accommodation MezIO® Module



Key Features


- Accommodates one 2.5" SATA HDD/ SSD
- One full-size mini-PCIe port with SIM socket

Ordering Information

Model No.	Product Description
MezIO®-R11	MezIO® module with 2.5" SATA HDD/ SSD, for POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series
MezIO®-R12	MezIO® module with SATA port for 2.5" HDD/ SSD, 4-CH isolated DI and 4-CH isolated DO, for POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series

MezIO® - G4P/ MezIO® -G4

4-Port GbE with 802.3at PoE+ MezIO® Module

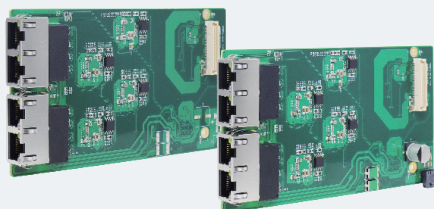

Key Features

- 4x gigabit Ethernet ports
- Compliant with 802.3at PoE+ (MezIO-G4P)
- Supporting 9.5 KB jumbo frame

Specifications


	MezIO® - G4P	MezIO® - G4
Gigabit Ethernet Port	4x GigE ports by 4x Intel® I210 controllers, supporting 9.5 kB jumbo frame	
PoE Capability	Compliant with IEEE 802.3at-2009 (PoE+), each port delivers up to 25.5 W of power	-
Cable Requirement	CAT-5e or CAT-6 cable, 100 meters maximum	

Ordering Information

Model No.	Product Description
MezIO® - G4P	4-Port GbE with 802.3at PoE+ MezIO® module for Nuvo-11000/ Nuvo-9000/ Nuvo-7000 series
MezIO® - G4	4-Port GbE MezIO® module for Nuvo-11000/ Nuvo-9000/ Nuvo-7000/ POC-900/ POC-500 series

MezIO® -U4

4-Port USB 3.1 MezIO® Module



Key Features

- 4 x USB 3.1 ports by independent Renesas μPD720202 Host Controllers
- Up to 5 Gbps each port (MezIO-U4-50)
- Support up to 900 mA per port

Specifications

	MezIO® -U4-30	MezIO® -U4-50
USB Ports	4x USB 3.1 ports, compatible with USB 2.0/1.1/1.0	
USB Controller	2 x Renesas μPD720202 Host Controllers	4 x Renesas μPD720202 Host Controllers
USB Connectors	4x USB 3.1 Type-A connectors	
USB Per-Port Current Limit	900mA	
Interface Signals	5 Gbps shared by two ports	5 Gbps for each port

Ordering Information

Model No.	Product Description
MezIO® -U4-30	4-port USB 3.1 MezIO® module for POC-700/ POC-600/ POC-500/ POC-400/ POC-300 series
MezIO® -U4-50	4-port USB 3.1 MezIO® module for POC-900/ POC-500 series, and Nuvo-11000/ Nuvo-9000/ Nuvo-7000 series