




## NC85-E350-LF

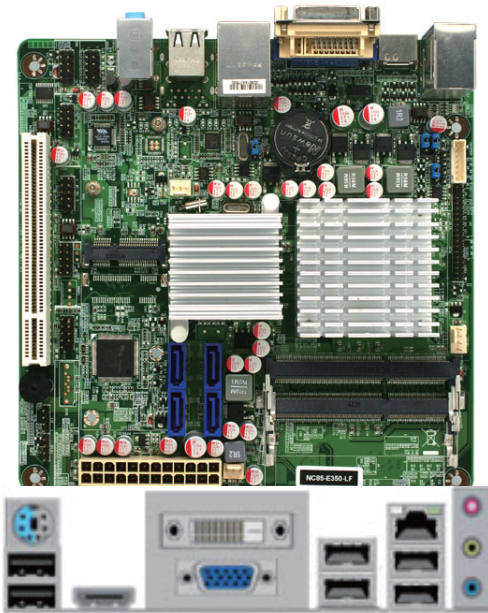

1. AMD Brazos Zacate + Hudson D1 Chipset
2. Support AMD Zacate E350 Dual core 1.6GHz APU
3. Support DirectX 11 3D Graphics Acceleration
4. Support 4 Serial ATA2 (3Gb/s) Devices
5. Support DDR3 800-1066 Single Channel 64-bit, up to 8GB
6. Integrated VIA VT1705 HD Audio CODEC with 6-CH
7. Support DVI-D/HDMI Output
8. Supports 1 \* Realtek RT8111E Gigabit LAN
9. Compliance with ErP standard
10. ITX Form Factor(170mm x 170mm)

### Board Specifications

■ <b>CPU</b>	■ Support AMD Zacate E350 Dual core 1.6GHz APU
■ <b>Chipset</b>	■ AMD Brazos Zacate + Hudson D1 Chipset
■ <b>Memory</b>	■ 2 * SODIMM Sockets for un-buffered Single Channel 64-bit DDR3 800-1066 SDRAM up to 8 GB
■ <b>Expansion Slots</b>	■ 1 * 32-bit PCI slot ■ 1 * Mini PCI-E
■ <b>Storage</b>	■ 4 * Serial ATA2 3Gb/s connectors
■ <b>Audio</b>	■ VIA VT1705 6-Channel HD Audio CODEC
■ <b>Ethernet LAN</b>	■ 1 * Realtek RTL8111E PCI-E LAN chip for Gigabit LAN
■ <b>USB</b>	■ Embedded 10 * USB 2.0/1.1
■ <b>Rear Panel I / O</b>	■ 6 * USB 2.0/1.1 ports ■ 1 * PS2 KB/MS port ■ 1 * RJ-45 ports ■ 1 * Audio I / O port ■ 1 * VGA port & 1 * DVI-D port & 1 * HDMI port
■ <b>Internal I / O</b>	■ CPU / Chassis Fan connectors; ■ 1 * 24-pin ATX Power connector ■ 1 * 18 bit Single Channel LVDS header ■ 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports ■ 1 * COM Port & 1 * GPIO header ■ 1 * CIR header
■ <b>BIOS</b>	■ AMI 16MB SPI Flash ROM
■ <b>Form Factor</b>	■ Mini ITX Form Factor(170mmx170mm)