

FX fanless series

# FX5504

C-M/P-m Small System with DVI,2S,2LAN,4USB,Audio,CF/m-PCI and DC I/P



Features

- Fanless and Low Power Consumption Design
- Intel 600MHz/1.4GHz Celeron-M/Pentium-M
- Intel 852GME+ICH4 Chipset With AGPX4 GPU
- 1 184-Pin DIMM Socket With 256MB DDR-SDRAM
- Software Programmable Watchdog
- CPU Voltage and Temperature Monitoring
- 1 Mini-PCI Socket

Specifications

**CPU Board:** Intel 600MHz/1.4GHz Celeron-M/Pentium-M CPU  
One 184 pin DDR socket up to 1GB DDR-RAM

**I/O Outlets:** 1 PS/2 Keyboard/mouse  
1 DVI  
4 USB 2.0 connectors  
2 RJ45 (Realtek RTL8110S chipset,100/1000 Base-TX)  
1 RS-232 and 1 RS-232/RS-485 connectors  
2 Audio connectors (Line-In and Line-Out)  
1 DC-In connector  
1 Push Button reset switch

**Storage Bay:** One 2.5" HDD space, and 1 CompactFlash slot.


**LED Indicators:** 1 power LED, 1 hard disk access LED, and 2 LAN-Access LEDs.

**Power Req.:** DC 12V~24V,40VA maximum.

**Operating Temperature:** 0~ 45 degree C. (32~113 degree F.)

**Dimensions:** 203mm (W) x 148mm (D) x 55mm (H)

**Accessory:** One 65-Watt AC to DC19V Adapter with Power Cable

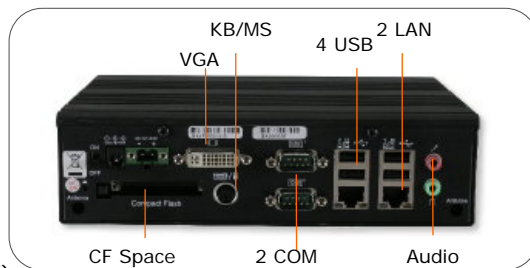

Order Information

Model	Description	Drivers
FX5504	Celeron-M 600MHz Embedded System with VGA, 2LAN,4USB,2S,Audio and 512MB DDR-RAM	* VGA/Audio Win95/98/NT/2K/XP * LAN Novell 3.X / 4.X, Win95/98/NT, Linux, NDIS, MSLAN * USB Win95/98/NT/2K/XP
FX5504A	Pentium-M 1.4GHz Embedded System with VGA, 2LAN,4USB,2S,Audio and 512MB DDR-RAM	