




NF9A-Q67

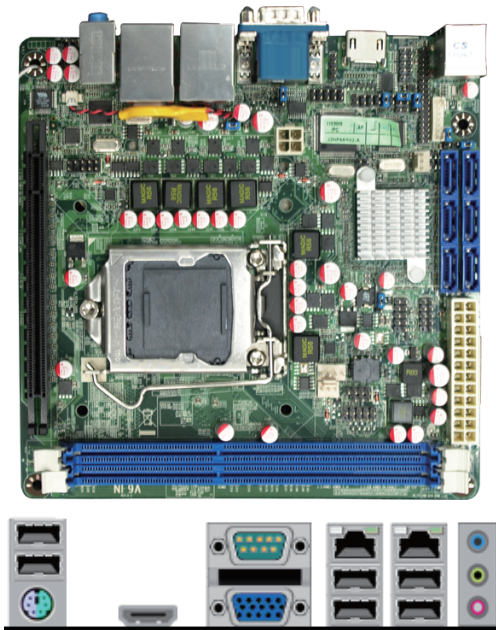

1. Intel® Q67 Express Chipset
2. Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
3. 2 * Dual Channel DDR3-1333/1066 up to 16GB
4. Intel 82579LM & 82574L Gigabit LAN
5. Intel Active Management Technology (iAMT 7.0)
6. PCI Express x16 Slot
7. Integrated 24-bit Dual Channel LVDS
8. 4-port SATAII 3Gb/s & 2-port SATA III 6Gb/s with RAID 0, 1, 5, 10 & JBOD Support
9. HDMI, and VGA Video Outputs
10. Built-in Watchdog Timer Technology
11. Mini-ITX Form Factor (170mm x 170mm)

Board Specifications

■ CPU	■ INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
■ Chipset	■ INTEL® Q67 Chipset ■ Clock 100MHz
■ Memory	■ 2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
■ Expansion Slots	■ 1 *PCIe x 16
■ Storage	■ 2 * Serial ATA3 6Gb/s & 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, 5, 10
■ Audio	■ VIA VT1705 6-Channel HD Audio CODEC
■ Ethernet LAN	■ Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN
■ LVDS	■ Onboard 24-bit dual channel LVDS connector
■ USB	■ Embedded 10 * USB 2.0/1.1
■ Special Features	■ Support ACPI S3 ■ Support Watch Dog ■ Support CPU Smart FAN
■ Rear Panel I / O	■ 6 * USB 2.0/1.1 ports ■ 1 * PS2/KB Connector ■ 2 * RJ-45 port ■ 1 * HDMI port ■ 1 * COM port ■ 1 * VGA port ■ 3 * Audio Phone Jack
■ Internal I / O	■ 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports ■ CPU /NB / Chassis Fan connectors ■ 1 * GPIO header ■ 1 * COM header(RS232/422/485) ■ 1 * IR header ■ 1 * Chassis Intrusion header ■ 1 * AUDIO header ■ 1 * 24-pin & 4-pin 12V ATX Power connector
■ BIOS	■ AMI EFI 64MB SMT Flash ROM
■ Form Factor	■ Mini-ITX Form Factor (170mm x 170mm)